


**Ref.: BM-M2208-07 KV:2600**

Zellen Cells	KV	Leerlauf- strom bei 10V Le courant	Max. Leistung Puissance	Widerstand Résistance	Durchmesser Diamètre	Länge Longeur	Stator Ø	Stator Länge Longeur	Welle Ø Axe Ø
3	2600	1.9A	290W	42mΩ	27.5mm	26mm	22mm	8mm	3mm
Modellgewicht Poid de modell		Empfohlener Propeller Recommande Hélice		Regler Controlleur		Gewicht Poids			
300-500g		2S 7x3.5"		3S 6x3"		30A		46g	

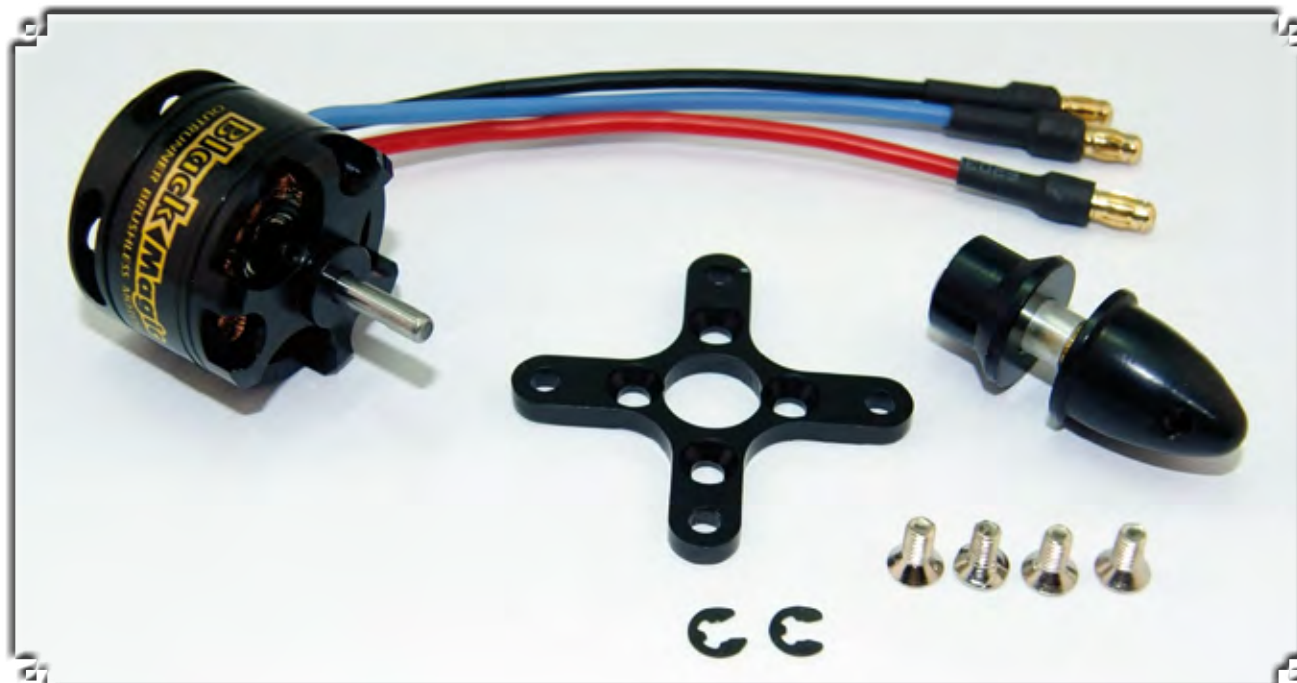

**2208 KV:2600 (Testet with 30A ESC)**

Propeller Hélice	Spannung V Tension V	Strom A Courant A	Leistung W Puissance W	Schub g
6 x 3"	10	22	220	700
	10.8	25.2	272	770
	11.1	26.3	291	790
7 x 3,5"	6.8	11.6	78	400
	7.4	13.5	99	480
	8	15.0	120	500



Zubehör: **Accessoires:**

**Ref.: BM-M2208-SH**  
 Motorwelle zu 2208 Serie  
 Axe de moteur pour série 2208

**Ref.: BM-MSP22**  
 Montagekreuz, Spannkonus und Spinner  
 Support moteur, cône de serrage et nez d'hélice